


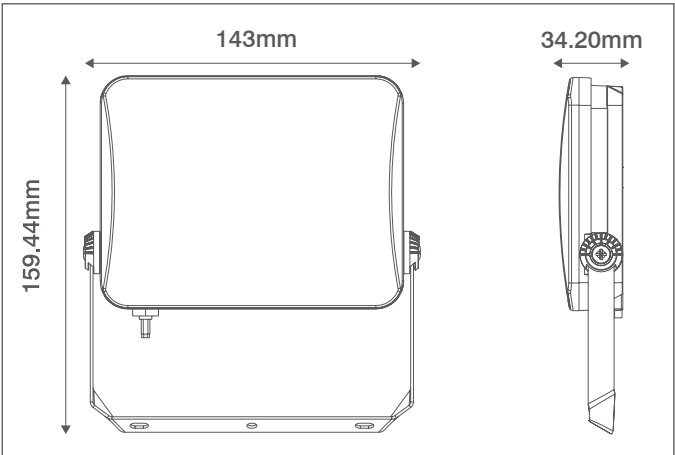

General Information

|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Dimensions (mm)     | 143 (W) 35 (D) 136 (H)                                 |
| Materials           | Body: Powder Coated Aluminium; Diffuser: Polycarbonate |
| Colour              | Black                                                  |
| Product Weight (Kg) | 0.22                                                   |
| Ingress Protection  | IP65                                                   |
| Impact Rating (IK)  | 06                                                     |
| Flammability Rating | UL94-V2                                                |
| Mounting            | Wall                                                   |
| Warranty (Years)    | 3                                                      |

Supply & Power Information

|                                        |                                        |
|----------------------------------------|----------------------------------------|
| Continuous Operating Voltage (AC) (Hz) | 220-240 (50)                           |
| Safety Class                           | I                                      |
| Circuit Wattage (W)                    | 30                                     |
| Input Current (mA)                     | 130                                    |
| Inrush Current/Time                    | 6.16A (0.062ms)                        |
| Power Factor                           | >0.9                                   |
| Operating Temperature (°C)             | -20 to +40                             |
| Input Mains Cable                      | 3 x 1mm <sup>2</sup> H05RN-F (1 Metre) |

Luminaire Output

|                            |       |
|----------------------------|-------|
| Colour Temperature (K)     | 4000  |
| Colour Render Index (CRI)  | >80   |
| Typical Luminous Flux (lm) | 2700  |
| Efficacy (lm/W)            | 90    |
| Beam Angle (°)             | 100   |
| LED Lifetime (L70) (Hours) | 20000 |

Dimming Information

|          |    |
|----------|----|
| Dimmable | No |
|----------|----|

